利豹 LEPA
Aim for excellence

空冷旋風 LV12

CPU Cooler

產品特色

- **優異熱傳導性。**百葉窗鰭片設計導引”U”型熱流通道，提昇整體散熱效率。
- **卓越熱傳導效率。**創新鰭片設計打破熱邊界層，提高熱交換率。
- **直擊熱源。**H.D.T.(Heatpipe Direct Touch)專利製程縮短熱傳導距離，大幅提升散熱效能。
- **精準設計尺寸。**散熱器精算尺寸，大幅增加記憶體模組相容性。
- **增強使用壽命。**S.N.T.C(Super Nano Thermal Conductive)特級奈米散熱烤漆，防止鰭片氧化以延長使用壽命，並維持卓越效能表現。
- **專利APS三段式調速功能。**智能APS(Adjustable Peak Speed)風扇技術提供三段式PWM轉速區間，消費者可依需求調整風扇轉速。
- **BOL氣壓軸承。**BOL氣壓軸承風扇提高使用壽命且超靜音。
- **獨特個性外觀。**黑/白兩款優雅色系選擇。
- **靜音與效能完美結合。**精準鰭片間距提供靜音與散熱效能間最佳理想值。
- **簡易安裝扣具。**通用型扣具支援最新的Intel®和AMD®系統平台。

特色說明

RAM優異相容性

專利熱管直觸設計

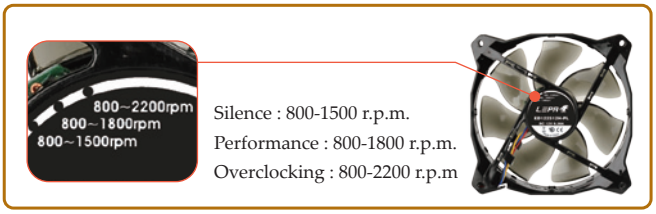

專利三段式高轉可調(APS) PWM控制功能

卓越”U”型導引熱流通道技術

百葉窗鰭片設計創造”U”型導引通道，延長風流路徑，帶走更多積熱。

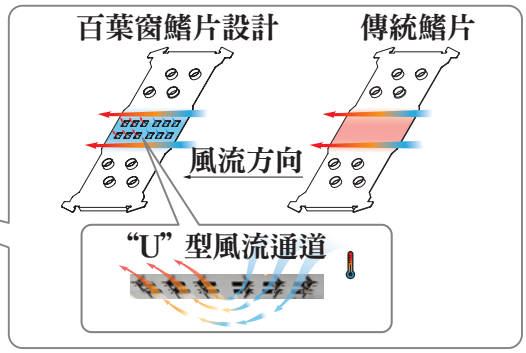

產品規格

型號	LPALV12
支援平台	Intel® LGA 775/1150/1151/1155/1156/1366/2011 and AMD®AM2/AM2+/AM3/AM3+/FM1/FM2/FM2+
產品總尺寸	138(L)×85(W)×160(H)mm
散熱器尺寸	138(L)×60(W)×160(H)mm
散熱器重量	460 g
熱導管數量	4 x Ø6 mm
材質	銅導管/鋁鰭片/S.N.T.C.烤漆
熱阻值	0.095 °C/W
導熱膏	道康寧® TC-5121
風扇尺寸	120 x 120 x 25 mm
風扇轉速	800~1500/1800/2200 r.p.m.
風量	40.7~76.6/91.6/112 CFM 69.2~130.2/174.4/213.1 m^3/h
風壓	0.83~1.8/2.43/3.64 mmH_2O
使用壽命	≧160,000 小時
噪音值	8~17/20/23 dBA
軸承	氣壓無油軸承
風扇轉接頭	4 pin PWM

產品尺寸



單位：mm





配件內容

CPU 散熱器	x 1
風扇	x 1
背板	x 1
絕緣墊片	x 4
螺柱	x 4
Intel 專用支架	x 2
AMD 專用支架	x 2
Intel 2011螺柱	x 4
支架用螺帽	x 4
壓板	x 1
壓板用螺帽	x 2
扳手	x 1
風扇線扣	x 4
減震橡膠	x 8
導熱膏	x 1
說明書	x 1

© 2014 LEPA Technology. All right reserved. Specifications are subject to change without prior notice. All trademarks, registered trademarks and product names mentioned are the property of their respective owners.